


## DIMENSION-POLYANT






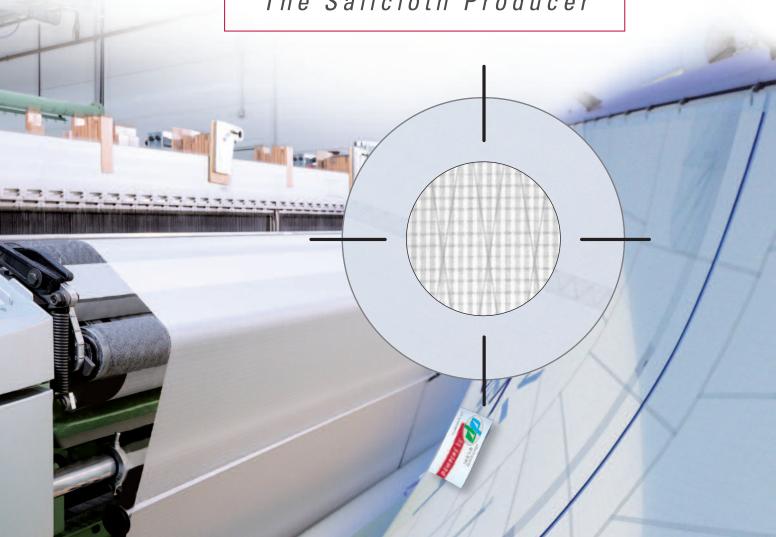

OCX-Line

DIMENSION-POLYANT's Cruising Laminates were designed for demanding blue water sailors. They combine technical efficiency, durability and easy

handling. The special UVM $^{\circledR}$  coating provides a high resistance against UV and mildew. The new DCX line is a further development of our successful and well proven DC laminates. The core Polyester scrim gains off-threadline support with the insertion of a 9° X-Ply and is encapsulated between two layers of film. The outer taffetas provide a smooth surface and high abrasion resistance. The DCX line is available in various weights and is suitable for most Head- and Mainsails.

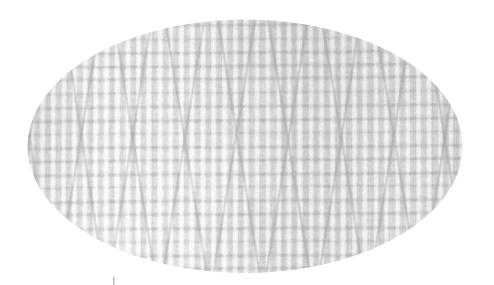

CX-Line



# HIGHEST QUALITY FROM THE START

DIMENSION-POLYANT uses only performance high tenacity fibers, customdeveloped chemicals as well as premium films from qualified suppliers

#### • IN-HOUSE MANUFACTURING

DIMENSION-POLYANT is worldwide the sole producer of high quality sailcloth with its own in-house manufacturing. As sailcloth is our only product we have invested in customized equipment for weaving, finishing and laminating.

### CONTINUOUS INNOVATION

DIMENSION-POLYANT has the most dedicated R&D team, the state-of-


the-art facilities and preferred access to the newest fibers, chemicals and components. Together with German and American engineering this provides the base for trend setting developments.

#### GLOBAL REACH

Our worldwide distribution and technical support network makes DIMENSION-POLYANT the perfect partner for your sailmaker

improved elongation resistance
excellent diagonal stability
highly resistant surfaces
UV stabilisation

mildew protection



| Application DCX |                |               |              |
|-----------------|----------------|---------------|--------------|
| Boat Length     | Mainsail       | Genoa         | <b>Jib</b>   |
|                 | front / back   | front / back  | front / back |
| 21` - 28`       | DCX-SL / DCX-L | DCX-SL        | DCX-L        |
| 29` - 36`       | DCX-L / DCX-M  | DCX-L / DCX-M | DCX-M        |
| 37` - 44`       | DCX-M / DCX-H  | DCX-M         | DCX-H        |